


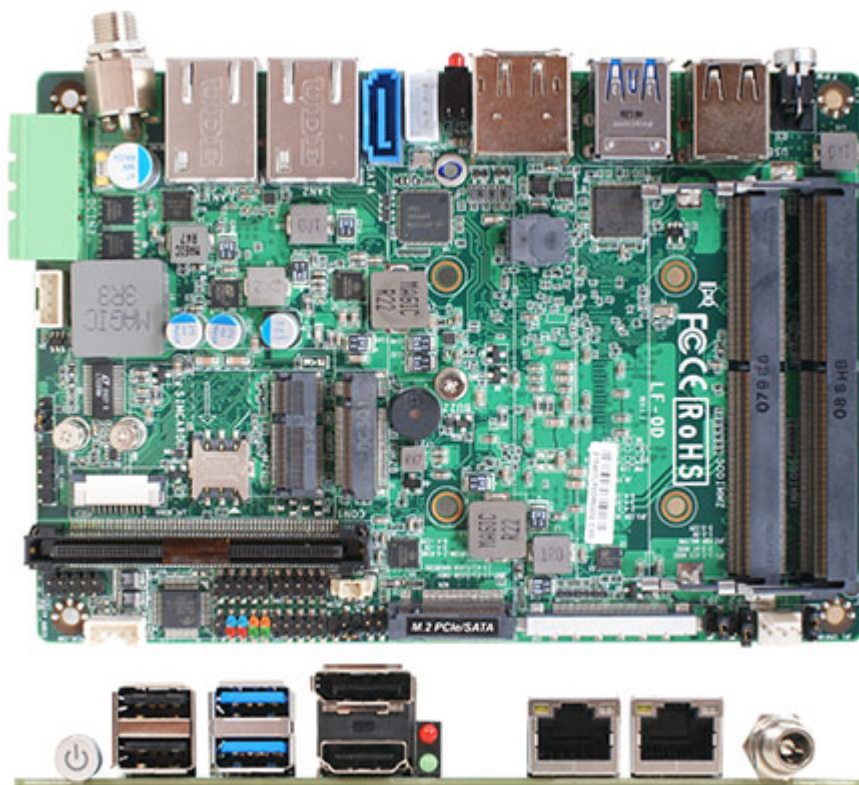

639.00 EUR

incl. 19% VAT, plus [shipping](#)

- i5-8265U !
- 2x LAN !
- 12~36V DC in !
- 3.5" Formfactor !

Support: [Datasheet](#)

- Intel® 8th Gen Whiskey lake I5-8265U 1.6GHz/QC Core MCP Processor
- 2\* DDR4 2400MHz, up to 64GB
- 1\* Intel®I219LM GbE, 1\* Intel® i211AT GbE
- 1\* SATA III (6Gb/s), 1\* M.2 (M-key), 1\* M.2 E-key Support CNVi, 1\* M.2 B-key Support 4G/5G Module
- 1\* HDMI/DP + 1\* eDP
- 2\* RS232/422/485, 2\* USB3.0, 3\* USB2.0
- 12~36V DC in
- 3.5" Form Factor (146 \*102 mm)
- JLF0D-42 support TPM2.0 (option)

|                  |                                                                                                                                                                                    |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model            | <ul style="list-style-type: none"> <li>– JLF0D-40</li> <li>– JLF0D-42 (TPM2.0)</li> </ul>                                                                                          |
| Form Factor      | – 3.5" (146 * 102mm)                                                                                                                                                               |
| Processor System | <ul style="list-style-type: none"> <li>– Intel® 8th Gen Whiskey lake i5-8265U Quad Core MCP Processor</li> <li>– Intel SoC chipset</li> <li>– AMI 128Mb Flash ROM BIOS</li> </ul>  |
| Expansion Slot   | <ul style="list-style-type: none"> <li>– 1* M.2 E-key (2230,Support CNVi)</li> <li>– 1* M.2 B-key (3042/3052,Support 4G/5G Module)</li> <li>– 1* SIM Card Holder (Nano)</li> </ul> |
| Memory           | – 2* DDR4 2400MHz DRAM SO-DIMM up to 64GB                                                                                                                                          |

|                |                                                                                                                                                                                                                                                                                                                                         |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics       | <ul style="list-style-type: none"> <li>– Intel® HD Graphics, shared memory</li> <li>– 1* HDMI 1.4 (Max Resolution : 4096×2304@24Hz)</li> <li>– 1* DP (Max Resolution : 4096×2304@60Hz)</li> <li>– 1* eDP (Max Resolution : 4096×2304@60Hz)</li> <li>– Support Triple Displays</li> </ul>                                                |
| Ethernet       | <ul style="list-style-type: none"> <li>– 1* Intel® i219LM GbE</li> <li>– 1* Intel® i211AT GbE</li> </ul>                                                                                                                                                                                                                                |
| Audio          | <ul style="list-style-type: none"> <li>– USB Audio</li> <li>– 3W AMP speaker</li> </ul>                                                                                                                                                                                                                                                 |
| Storage        | <ul style="list-style-type: none"> <li>– 1* M.2 M-key (2242/2280, SATA or NVMe- PCI-Ex4)</li> <li>– 1* SATAIII</li> </ul>                                                                                                                                                                                                               |
| Rear I/O       | <ul style="list-style-type: none"> <li>– 1* HDMI</li> <li>– 1* DP</li> <li>– 2* RJ45 Ethernet</li> <li>– 2* USB3.0</li> <li>– 2* USB2.0</li> <li>– Power button</li> <li>– 12~36V DC-in jack</li> </ul>                                                                                                                                 |
| Internal I/O   | <ul style="list-style-type: none"> <li>– 1* USB2.0</li> <li>– 2* RS232/422/485</li> <li>– 1* SATAIII (6.0Gb/s)</li> <li>– 3* M.2 (M-key, E-key, B-key)</li> <li>– 1* GPIO (8 bit, 5V)</li> <li>– 1* AT mode</li> <li>– 1* I2C/SMBUS</li> <li>– 1* FP_Audio</li> <li>– 1* Speaker</li> <li>– JLF0D-42 support TPM2.0 (Option)</li> </ul> |
| Watchdog Timer | <ul style="list-style-type: none"> <li>– From Super I/O to drag RESETCON#</li> <li>– 256 segments (10sec ~ 255min)</li> </ul>                                                                                                                                                                                                           |
| Power          | <p>DC-in 12~36V, AT/ATX Supported</p> <ul style="list-style-type: none"> <li>– AT: Directly PWR on as Power input ready</li> <li>– ATX: Press Button to PWR on after Power input ready</li> </ul>                                                                                                                                       |
| Compliance     | <ul style="list-style-type: none"> <li>– CE, FCC, RoHS, REACH</li> </ul>                                                                                                                                                                                                                                                                |
| Temperature    | <ul style="list-style-type: none"> <li>– Operating: 0°C ~ 60°C</li> <li>– Storage: -20°C ~ 70°C</li> <li>– Humidity: 10% ~ 90% RH @40°C (non-condensing)</li> </ul>                                                                                                                                                                     |
| OS Support     | <ul style="list-style-type: none"> <li>– Windows 10, Linux</li> </ul>                                                                                                                                                                                                                                                                   |